

11/09/99

06435440-11069

jc682 U.S. PTO

Please type a plus sign (+) inside this box → ☒PTO/SB/05 (1/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 CFR 1.53(b))	Attorney Docket No.	042390.P5387
	First Inventor or Application Identifier	Lewis V. Rothrock
	Title	Digital Image Stitching
	Express Mail Label No.	EL079457639US

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original, and a duplicate for fee processing)	6. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification [Total Pages 23] (preferred arrangement set forth below) <ul style="list-style-type: none">- Descriptive title of the Invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure	7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 4]	
4. Oath or Declaration [Total Pages] <ul style="list-style-type: none">a. <input type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 17 completed) [Note Box 5 below]<ul style="list-style-type: none">i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	
5. <input type="checkbox"/> Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	
17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No: _____ / _____ Prior application information. Examiner _____ Group / Art Unit: _____	

ACCOMPANYING APPLICATION PARTS

- | | |
|--|--|
| 8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) | |
| 9. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement (when there is an assignee) <input type="checkbox"/> Power of Attorney | |
| 10. <input type="checkbox"/> English Translation Document (if applicable) | |
| 11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations | |
| 12. <input type="checkbox"/> Preliminary Amendment | |
| 13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503)
(Should be specifically itemized) | |
| 14. <input type="checkbox"/> * Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired (PTO/SB/09-12) | |
| 15. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) | |
| 16. <input type="checkbox"/> Other: _____ | |

* A new statement is required to be entitled to pay small entity fees, except where one has been filed in a prior application and is being relied upon.

18. CORRESPONDENCE ADDRESS	
<input type="checkbox"/> Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here)	or <input checked="" type="checkbox"/> Correspondence address below

Name	Matthew C. Fagan				
	Blakely, Sokoloff, Taylor & Zafman				
Address	12400 Wilshire Boulevard				
	Seventh Floor				
City	Los Angeles	State	CA	Zip Code	90025-1026
Country	USA	Telephone	(512) 434-2400	Fax	(512) 434-2401

Name (Print/Type)	Matthew C. Fagan	Registration No. (Attorney/Agent)	37,542
Signature		Date	11/9/99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

UNITED STATES PATENT APPLICATION

for

DIGITAL IMAGE STITCHING

Inventor:

Lewis V. Rothrock

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN, L.L.P.

12400 Wilshire Boulevard

Seventh Floor

Los Angeles, California 90025-1026

Telephone: (512) 434-2400

Facsimile: (512) 434-2401

Attorney's Docket No. 042390.P5387

"Express Mail" mailing label number: E1079457639US Date of Deposit: November 9, 1999

I hereby certify that I am causing this paper or fee to be deposited with the United States Postal Service "Express Mail Post Office to Addressee" service on the date indicated above and that this paper or fee has been addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Shenise Ramdeen

(Printed name of person mailing paper or fee)

Shenise Ramdeen

(Signature of person mailing paper or fee)

DIGITAL IMAGE STITCHING

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

5 The present invention relates generally to the field of digital image processing. More particularly, the present invention relates to the field of digital image stitching.

DESCRIPTION OF RELATED ART

A large or panoramic image that otherwise may not be captured as a single image with a camera may be captured by capturing two or more overlapping images and digitally combining or stitching them together to build the larger image.

10 As one example, a camera may be placed on a tripod and rotated to capture sequential images with a suitable amount of overlap, such as approximately 15% to approximately 30% for example, between the images. The images may be digitally captured or otherwise scanned or converted into a digital format. Known personal computer digital image formats include a
15 bitmap format commonly identified with a BMP file name extension, a joint photographic experts group (JPEG) format commonly identified with a JPG file name extension, a tagged image file format (TIFF) commonly identified with a TIF file name extension, a FlashPix format commonly identified with a FPX file name extension, and a graphics interchange format (GIF) commonly identified with a GIF file name extension.

20 For one typical stitching technique, a user positions the digital images as thumbnails of the larger image to be built. Alternatively, the order of the sequence of images is identified. In either case, two overlapping images are initially loaded into memory and stitched together to form a single, larger image. Stitching images may be performed using a suitable edge detection technique to identify where each image overlaps and appropriately merging the non-overlapping

portions of the images. An image that overlaps the current stitched image in memory is then loaded into memory and stitched with the current stitched image in memory to form an even larger, single image. This process is repeated until all images have been stitched to form the desired large image in memory.

5 This typical stitching technique performs adequately when using a personal computer to stitch just a few images or relatively low resolution images. Stitching many images or relatively high resolution images, however, may require using virtual memory as the amount of memory required to stitch each image with the current stitched image may exceed the amount of available physical memory. As the ability to capture higher resolution images with affordable digital
10 cameras improves, personal computers may perform this typical stitching technique even less adequately as the higher resolution images will require even more memory.

Where each image has three basic channels of colors, one stitching technique stores in memory only one of the three channels to match overlapping pixels, effectively reducing the required amount of memory by two-thirds. The memory requirements for relatively high
15 resolution images, however, may still be expensive.

BRIEF SUMMARY OF THE INVENTION

Where at least two digital images overlap at a first resolution level is identified. Overlapping areas of the at least two digital images at a second resolution level higher than the first resolution level are obtained. Where the overlapping areas overlap at the second resolution
20 level is identified.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example and not limitation in the figures of the accompanying drawings, in which like references indicate similar elements and in which:

Figure 1 illustrates an exemplary computer system for performing digital image stitching in accordance with the present invention;

Figure 2 illustrates an exemplary large digital image formed by stitching smaller, overlapping digital images;

Figure 3 illustrates, for one embodiment, a flow diagram for performing digital image stitching in accordance with the present invention; and

Figure 4 illustrates an exemplary digital image stored at different resolution levels.

DETAILED DESCRIPTION

The following detailed description sets forth an embodiment or embodiments in accordance with the present invention for digital image stitching. In the following description, details are set forth such as specific image resolutions, file formats, techniques, etc., in order to provide a thorough understanding of the present invention. It will be evident, however, that the present invention may be practiced without these details. In other instances, well-known techniques, etc., have not been described in particular detail so as not to obscure the present invention.

COMPUTER SYSTEM

Figure 1 illustrates, for one embodiment, a computer system 100 that may be programmed to perform digital image stitching in accordance with the present invention.

Computer system 100 comprises a processor 102, a bus 104, a static memory 106, a main memory 108, mass memories 110 and 112, an alphanumeric input device 114, a cursor control device 116, a display 118, and a printer 120. Bus 104 couples processor 102, static memory 106, main memory 108, mass memories 110 and 112, alphanumeric input device 114, cursor control device 116, display 118, and printer 120.

Processor 102 comprises a suitable processing device such as a microprocessor, for example. Processor 102 may execute instructions stored in static memory 106, main memory 108, mass memory 110, and/or mass memory 112 for example. Processor 102 may process data stored in static memory 106, main memory 108, mass memory 110 and/or mass memory 112 for example. For another embodiment, computer system 100 may comprise more than one processor coupled to bus 104 for executing instructions and/or processing data, for example.

Static memory 106, main memory 108, and mass memories 110 and 112 each comprise any suitable computer readable medium for storing data and/or instructions, for example. Static memory 106 may comprise read only memory (ROM) or any other suitable memory device. Static memory 106 may store, for example, a boot program for execution by processor 102 to initialize computer system 100. Main memory 108 may comprise random access memory (RAM) or any other suitable memory device for use as a working memory, for example, for processor 102. Mass memories 110 and 112 may each comprise a hard disk device, a floppy disk or diskette device, an optical disk device such as a compact disc (CD) or digital video disc (DVD) device for example, a Bernoulli disk device such as a Jaz or Zip disk device for example, a flash memory device, a file server device, and/or any other suitable memory device. For one embodiment, mass memory 110 comprises a hard disk device and mass memory 112 comprises an optical disk device. For this detailed description, suitable computer readable medium encompasses any suitable medium for storing information, such as data and/or instructions for example, in a form readable by a computer. Suitable computer readable medium encompasses not only a single memory device but also any combination of suitable memory devices.

Bus 104 provides for the communication of digital information between hardware devices for computer system 100. The hardware devices for computer system 100 may or may

not be local with respect to one another. Bus 104 may comprise any suitable communication hardware such as a local bus, a system bus, a local area network (LAN), a wide area network (WAN), or the Internet, for example, and may comprise any combination of suitable communication hardware.

5 Processor 102 may receive over bus 104 information that is input by a user through alphanumeric input device 114 and/or cursor control device 116. Alphanumeric input device 114 may comprise a keyboard, for example, that comprises alphanumeric keys. Alphanumeric input device 114 may comprise other suitable keys, such as function keys for example. Alphanumeric input device 114 may be used to input information or commands, for example, for computer system 100. Cursor control device 116 may comprise a mouse, touch tablet, track-ball, and/or joystick, for example, for controlling the movement of a cursor displayed by display 118 or may comprise suitable touch screen hardware and/or software for use with display 118.

Processor 102 may also output over bus 104 information that is to be displayed on display 118 or printed by printer 120. Display 118 may comprise a cathode ray tube (CRT) or a liquid crystal display (LCD), for example, for displaying information to a user. Processor 102 may use bus 104 to transmit information to and to receive information from other hardware devices, such as mass memories 110 and 112 for example.

Computer system 100 may be a desktop personal computer (PC) system, a laptop or notebook computer system, or any other suitable computer system. Although digital image stitching in accordance with the present invention is described in the context of computer system 100, any suitable computer system configured with any suitable combination of hardware devices may be used.

DIGITAL IMAGE STITCHING

Computer system 100 may be programmed to execute suitable program code or machine instructions directing computer system 100 to perform digital image stitching in accordance with the present invention. The executable program code or machine instructions may be stored in
5 main memory 108 and/or mass memory 110 and/or mass memory 112 for execution by processor 102.

In accordance with the present invention, computer system 100 stitches or combines two or more overlapping digital images to form a single, larger digital image. Figure 2 illustrates an exemplary large digital image 200 formed by stitching smaller, overlapping digital images 201,
10 202, 203, 204, 205, and 206.

Computer system 100 may stitch digital images that overlap in any suitable manner. Computer system 100, for example, may stitch digital images that overlap in a linear manner to form a larger, panoramic image. Computer system 100 may also stitch digital images that overlap one another in a stacked manner, such as for the example illustrated in Figure 2.
15

For one embodiment, each image should overlap each adjacent image by a minimum suitable percentage or amount of overlap to help ensure each image is appropriately stitched with each adjacent, overlapping image. As one example, each image should overlap each adjacent image by at least approximately 10% to approximately 20%.

Computer system 100 for one embodiment performs digital image stitching in accordance
20 with a flow diagram 300 as illustrated in Figure 3.

Each of at least two overlapping digital images is stored 302 at different resolution levels. The stored images are to be stitched to form a single, larger image. For one embodiment, the overlapping images to be stitched are identified by a user using, for example, alphanumeric input

device 114 and/or cursor control device 116. For the example of Figure 2, each image 201-206 is stored at different resolution levels. Any suitable number of overlapping images that are to be stitched to form a single, larger image may be stored. The overlapping images may be stored in any suitable image format in mass memory 110 and/or mass memory 112, for example.

5 Each overlapping image may be stored at any suitable resolution levels in accordance with any suitable scheme. For one embodiment, each image is stored at resolution levels of 1, $\frac{1}{2}$, $\frac{1}{4}$, etc. times the original resolution level of the image, with rounding as necessary. The highest resolution level for each image may therefore be the original resolution of the image, for example. The lowest resolution level for each image may be, for example, the first lower resolution level less than or equal to a predetermined resolution level threshold. The number of resolution levels may therefore depend, for example, on the original resolution of each image to be stitched. As one example, an image having an original resolution level of 255 x 385 pixels may be stored at four resolution levels: 255 x 385 pixels, 128 x 193 pixels, 64 x 97 pixels, and 32 x 49 pixels, where 64 x 64 pixels may be the lower predetermined resolution level threshold with which the lowest resolution level is determined. Four copies of each overlapping image, each at a different resolution level, are therefore stored.

Computer system 100 may generate and store each overlapping image at different resolution levels based on the image at its original resolution level. Alternatively, each overlapping image may be prestored in mass memory 110 and/or mass memory 112, for example, at different resolution levels. For one embodiment, each overlapping image is stored at different resolution levels in the FlashPix format.

Computer system 100 retrieves 304 a set of at least two stored overlapping images at a lower resolution level and stores or loads 306 each retrieved image into memory, such as main

memory 108 for example, for analysis. For one embodiment, the position of each overlapping image with respect to each other overlapping image in the single, larger image is identified by a user using, for example, alphanumeric input device 114 and/or cursor control device 116.

Computer system 100 may retrieve any suitable number of stored overlapping images at a lower resolution level. For the example of Figure 2, images 201 and 202, for example, may be retrieved at a lower resolution level for analysis. Each retrieved image may be retrieved at any suitable lower resolution level such as, for example, the lowest or next lowest resolution level at which the image is stored. The lower resolution level at which each image is retrieved may depend, for example, on the number of images retrieved and the amount of available memory.

Computer system 100 identifies 308 where each current retrieved image overlaps another current retrieved image. Computer system 100 for one embodiment identifies coordinates where each current retrieved image overlaps another current retrieved image. Computer system 100 may use any suitable technique, such as a suitable edge detection technique for example, to identify overlapping portions of the current retrieved images. Where the retrieved images are stored in the FlashPix format, for example, computer system 100 may identify, for each current retrieved image, resolution dependent coordinates where the image overlaps another current retrieved image. Computer system 100 may then convert each identified resolution dependent coordinate into a resolution independent coordinate for the image as defined by the FlashPix format.

Computer system 100 purges 310 the current retrieved images from memory, retrieves 312 overlapping areas of the current images at a higher resolution level, and stores or loads 314 the overlapping areas of the current images at the higher resolution level into memory, such as main memory 108 for example. The overlapping areas may be retrieved at any suitable higher

resolution level, such as the next higher resolution level for the current images for example. Any suitable overlapping areas of the current images may be retrieved.

For one embodiment, each stored image is divided into one or more tiles at each resolution level. As one example, as illustrated in Figure 4, an image having an original resolution level of 255 x 385 pixels may be stored at four resolution levels: 255 x 385 pixels at a highest resolution level 401, 128 x 193 pixels at a next highest resolution level 402, 64 x 97 pixels at a second lowest resolution level 403, and 32 x 49 pixels at a lowest resolution level 404. Given a tile threshold size of 64 x 64 pixels, the image is divided into 4 x 7 or 28 tiles at resolution level 401, 2 x 4 or 8 tiles at resolution level 402, 1 x 2 or 2 tiles at resolution level 403, and 1 x 1 or 1 tile at resolution level 404.

Computer system 100 then identifies overlapping tiles of the current images at the higher resolution level based on where the current images overlap at the lower resolution level. For one embodiment, computer system 100 identifies in each current image at the higher resolution level one or more tiles having identified coordinates where the current image overlaps another current image at the lower resolution level. Where the retrieved images are stored in the FlashPix format, for example, computer system 100 may use identified resolution independent coordinates where the current image overlaps another current image to identify the overlapping tiles of the current images. Computer system 100 retrieves the identified overlapping tiles of the current images and loads such tiles into memory.

Computer system 100 identifies 316 where each current overlapping area overlaps another current overlapping area. Computer system 100 may identify such overlap similarly as for 308. As the overlapping areas are analyzed at a higher resolution level, computer system 100 identifies with greater accuracy where the current images overlap one another. Where the

retrieved images are stored in the FlashPix format, for example, computer system 100 may refine identified resolution independent coordinates where the current image overlaps another current image.

Computer system 100 determines 318 whether the current images are to be analyzed at another higher resolution level. If so, computer system 100 repeats 310-318 for each of one or more higher resolution levels until the current images have been analyzed at a highest desired resolution level. The highest desired resolution level may or may not be the highest available resolution level of the current images. The highest desired resolution level may depend, for example, on the highest available resolution level of the current images, the resolution level at which each current image may be displayed or printed, and/or the resolution level at which the combined, larger image may be displayed or printed.

By analyzing overlapping images at a lower resolution level and then analyzing only areas of overlap of the images at one or more higher resolution levels, computer system 100 may analyze high resolution images with relatively less physical memory, such as main memory 108 for example, and/or with minimized or no need for virtual memory. Entire images may be analyzed to identify overlapping areas at a lower resolution level, requiring less memory as compared to analyzing those same images at a higher resolution level. Only identified overlapping areas are then analyzed at one or more higher resolution levels, requiring less memory as compared to analyzing the entire images at the one or more higher resolution levels as any higher resolution non-overlapping areas are not unnecessarily loaded or stored in memory.

Although described as storing overlapping images at different resolution levels prior to analyzing such images for overlap, computer system 100 for another embodiment may generate overlapping images or image areas at suitable resolution levels while analyzing images for

overlap. That is, computer system 100 may generate overlapping images at a lower resolution level as needed for 304 and may identify and generate overlapping areas of current images at a higher resolution level as needed for 312.

When the current images have been analyzed at the highest desired resolution level, as
5 determined for 318, computer system 100 purges 320 overlapping image areas from memory and determines 322 whether any more stored overlapping images are to be analyzed. If so, computer system 100 repeats 304-322 until each stored overlapping image has been analyzed with respect to the other stored overlapping images. For the example of Figure 2, image 201 is analyzed with respect to images 202, 204, and 205. Image 202 is analyzed with respect to images 201, 203,
10 204, 205, and 206. Image 203 is analyzed with respect to images 202, 205, and 206. Image 204 is analyzed with respect to images 201, 202, and 205. Image 205 is analyzed with respect to images 201, 202, 203, 204, and 206. Image 206 is analyzed with respect to images 202, 203, and 205. Computer system 100 may analyze any suitable number of images at a time and in any suitable order.

Computer system 100 may maintain and store any suitable information identifying where
a stored overlapping image overlaps another stored overlapping image. Computer system 100 may maintain and store, for example, overlapping coordinate information and/or overlapping area information. Computer system 100 may maintain and store such information for any suitable resolution level(s) of a stored overlapping image. Computer system 100 may maintain
20 and store such information, for example, for only the highest desired resolution level or for all resolution levels of a stored overlapping image.

Computer system 100 may maintain and store such information in any suitable manner. For one embodiment, computer system 100 may maintain such information in memory as current

images are being analyzed and then store such information in mass memory 110 and/or mass memory 112, for example, when the current images have been analyzed at the highest desired resolution level as determined for 318. Computer system 100 may store all such information in a single file to identify where the stored overlapping images to be combined to form a single, larger image overlap one another. Computer system 100 may also store such information in separate files each corresponding to a set of two or more stored overlapping images.

Computer system 100 may also store with a stored overlapping image suitable information identifying where the stored overlapping image overlaps one or more other stored overlapping images. Where images are stored in the FlashPix format, for example, computer system 100 may store as a FlashPix extension for a stored overlapping image the resolution independent coordinates where the stored overlapping image overlaps one or more other stored overlapping images. Computer system 100 for one embodiment may store such resolution independent coordinates for the stored overlapping image at each analyzed resolution level.

When all desired stored overlapping images have been analyzed for overlap, as determined for 322, computer system 100 may combine 324 all or a subset of the analyzed stored overlapping images to form a single, larger image. For the example of Figure 2, computer system 100 may combine all images 201-206 to form image 200. Computer system 100 may form the single, larger image in any suitable image format. For one embodiment, computer system 100 forms the single, larger image in a single file for storage and subsequent retrieval. Computer system 100 may also form the single, larger image for display on display 118 or for printing with printer 120. Computer system 100 may optionally crop or mask any stepped edges of the single, larger image as desired. The stepped edges of image 200, for example, may be cropped to shape image 200 as a rectangle.

Computer system 100 may combine stored overlapping images in any suitable order and in any suitable manner. For one embodiment, computer system 100 may build a single, larger image by adding one stored overlapping image at a time based on the position of the stored overlapping image within the single, larger image and based on stored information identifying how the stored overlapping image overlaps with adjacent images already added in building the single, larger image. Computer system 100 may add each stored overlapping image in building the single, larger image in mass memory 110 and/or mass memory 112, for example.

As information identifying how stored overlapping images overlap is saved, stored overlapping images may be combined in any suitable manner at any suitable time. Where such information is stored for more than one resolution level of stored overlapping images, computer system 100 may combine such images at any desired resolution level to form a single, larger image at the desired resolution level. Computer system 100, for example, may combine such images at a desired one of a number of resolution levels for display on display 118 and/or at a desired one of a number of resolution levels for printing with printer 120.

Although described as combining stored overlapping images for 324 after analyzing the stored overlapping images for 304-322, computer system 100 for another embodiment may combine stored overlapping images while computer system 100 analyzes stored overlapping images.

As one example, computer system 100 may analyze two or more stored overlapping images for overlap and combine them to start building a single, larger image. Computer system 100 may then analyze the partially built single, larger image and one or more stored overlapping images for overlap and combine them to build the single, larger image further. Computer system 100 may continue analyzing and combining stored overlapping images in this manner until the

single, larger image is built. For the example of Figure 2, images 201 and 202 may be analyzed for overlap and combined to start building image 200. Image 203 and the combined image formed from images 201 and 202 may then be analyzed for overlap and combined. Image 204 and the combined image formed from images 201, 202, and 203 may then be analyzed for overlap and combined. Image 205 and the combined image formed from images 201, 202, 203, and 204 may then be analyzed for overlap and combined. Lastly, image 206 and the combined image formed from images 201, 202, 203, 204, and 205 may be analyzed for overlap and combined to form image 200.

As another example, computer system 100 may analyze and combine separate sets of stored overlapping images and then analyze and combine the separate combined sets of images. For the example of Figure 2, images 201 and 204 may be analyzed for overlap and combined with one another. Images 202 and 205 may be analyzed for overlap and combined with one another. Images 203 and 206 may be analyzed for overlap and combined with one another. Each combined pair of images may then be analyzed for overlap and combined to form image 200.

In the foregoing description, the invention has been described with reference to specific exemplary embodiments thereof. It will, however, be evident that various modifications and changes may be made thereto without departing from the broader spirit or scope of the present invention as defined in the appended claims. The specification and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense.

What is claimed is:

1. A method comprising:
identifying where at least two digital images overlap at a first resolution level;
obtaining overlapping areas of the at least two digital images at a second resolution level
higher than the first resolution level; and
identifying where the overlapping areas overlap at the second resolution level.

2. The method of claim 1, wherein each of the at least two digital images are stored at the
first and second resolution levels; and
wherein the obtaining comprises retrieving the overlapping areas from the at least two
digital images at the second resolution level.

3. The method of claim 1, wherein the method comprises:
storing the at least two digital images at the first resolution level in memory to identify
where the at least two digital images overlap at the first resolution level; and
purging the memory of the at least two digital images prior to obtaining the overlapping
areas;
wherein the obtaining comprises storing the overlapping areas in the memory.

4. The method of claim 1, wherein the identifying where the at least two digital images
overlap at the first resolution level and the identifying where the overlapping areas overlap at the
second resolution level each comprise using an edge detection technique.

5. The method of claim 1, wherein the identifying where the at least two digital images overlap at the first resolution level comprises identifying coordinates where the at least two digital images at the first resolution level overlap; and

wherein the obtaining comprises identifying the overlapping areas based on the identified coordinates.

6. The method of claim 1, comprising:
combining the at least two digital images.

7. The method of claim 1, comprising:
identifying where the at least two digital images overlap at one or more resolution levels higher than the second resolution level.

8. The method of claim 1, comprising:
identifying where another set of at least two digital images overlap at the first resolution level;

obtaining overlapping areas of the other set of at least two digital images at the second resolution level;

identifying where the overlapping areas of the other set of at least two digital images overlap at the second resolution level; and

combining the digital images.

9. A computer readable medium having computer executable instructions for:
identifying where at least two digital images overlap at a first resolution level;
obtaining overlapping areas of the at least two digital images at a second resolution level
higher than the first resolution level; and
identifying where the overlapping areas overlap at the second resolution level.

10. The computer readable medium of claim 9, wherein each of the at least two digital
images are stored at the first and second resolution levels; and
wherein the obtaining comprises retrieving the overlapping areas from the at least two
digital images at the second resolution level.

11. The computer readable medium of claim 9, having computer executable instructions for:
storing the at least two digital images at the first resolution level in memory to identify
where the at least two digital images overlap at the first resolution level; and
purging the memory of the at least two digital images prior to obtaining the overlapping
areas;
wherein the obtaining comprises storing the overlapping areas in the memory.

12. The computer readable medium of claim 9, wherein the identifying where the at least two
digital images overlap at the first resolution level and the identifying where the overlapping areas
overlap at the second resolution level each comprise using an edge detection technique.

13. The computer readable medium of claim 9, wherein the identifying where the at least two digital images overlap at the first resolution level comprises identifying coordinates where the at least two digital images at the first resolution level overlap; and

wherein the obtaining comprises identifying the overlapping areas based on the identified coordinates.

14. The computer readable medium of claim 9, having computer executable instructions for combining the at least two digital images.

15. The computer readable medium of claim 9, having computer executable instructions for identifying where the at least two digital images overlap at one or more resolution levels higher than the second resolution level.

16. The computer readable medium of claim 9, having computer executable instructions for: identifying where another set of at least two digital images overlap at the first resolution level;

obtaining overlapping areas of the other set of at least two digital images at the second resolution level;

identifying where the overlapping areas of the other set of at least two digital images overlap at the second resolution level; and

combining the digital images.

17. A computer system comprising:

- (a) one or more processors;
- (b) computer readable medium to store instructions which, when executed by the one

or more processors, perform:

- (i) identifying where at least two digital images overlap at a first resolution level,
- (ii) obtaining overlapping areas of the at least two digital images at a second resolution level higher than the first resolution level, and
- (iii) identifying where the overlapping areas overlap at the second resolution level.

18. The computer system of claim 17, comprising computer readable medium to store each of the at least two digital images at the first and second resolution levels; and

wherein the obtaining comprises retrieving the overlapping areas from the at least two digital images at the second resolution level.

19. The computer system of claim 17, wherein the computer readable medium stores instructions for:

storing the at least two digital images at the first resolution level in memory to identify where the at least two digital images overlap at the first resolution level; and

purging the memory of the at least two digital images prior to obtaining the overlapping areas;

wherein the obtaining comprises storing the overlapping areas in the memory.

20. The computer system of claim 17, wherein the identifying where the at least two digital images overlap at the first resolution level and the identifying where the overlapping areas overlap at the second resolution level each comprise using an edge detection technique.

21. The computer system of claim 17, wherein the identifying where the at least two digital images overlap at the first resolution level comprises identifying coordinates where the at least two digital images at the first resolution level overlap; and

wherein the obtaining comprises identifying the overlapping areas based on the identified coordinates.

22. The computer system of claim 17, wherein the computer readable medium stores instructions for combining the at least two digital images.

23. The computer system of claim 17, wherein the computer readable medium stores instructions for identifying where the at least two digital images overlap at one or more resolution levels higher than the second resolution level.

24. The computer system of claim 17, wherein the computer readable medium stores instructions for:

identifying where another set of at least two digital images overlap at the first resolution level;

obtaining overlapping areas of the other set of at least two digital images at the second resolution level;

identifying where the overlapping areas of the other set of at least two digital images overlap at the second resolution level; and

combining the digital images.

25. A computer system comprising:

means for identifying where at least two digital images overlap at a first resolution level;

means for obtaining overlapping areas of the at least two digital images at a second resolution level higher than the first resolution level; and

means for identifying where the overlapping areas overlap at the second resolution level.

26. The computer system of claim 25, comprising:

means for storing the at least two digital images at the first resolution level in memory to identify where the at least two digital images overlap at the first resolution level; and

means for purging the memory of the at least two digital images prior to obtaining the overlapping areas;

wherein the obtaining means comprises means for storing the overlapping areas in the memory.

27. The computer system of claim 25, comprising:

means for combining the at least two digital images.

ABSTRACT OF THE DISCLOSURE

Where at least two digital images overlap at a first resolution level is identified.

Overlapping areas of the at least two digital images at a second resolution level higher than the first resolution level are obtained. Where the overlapping areas overlap at the second resolution

5 level is identified.

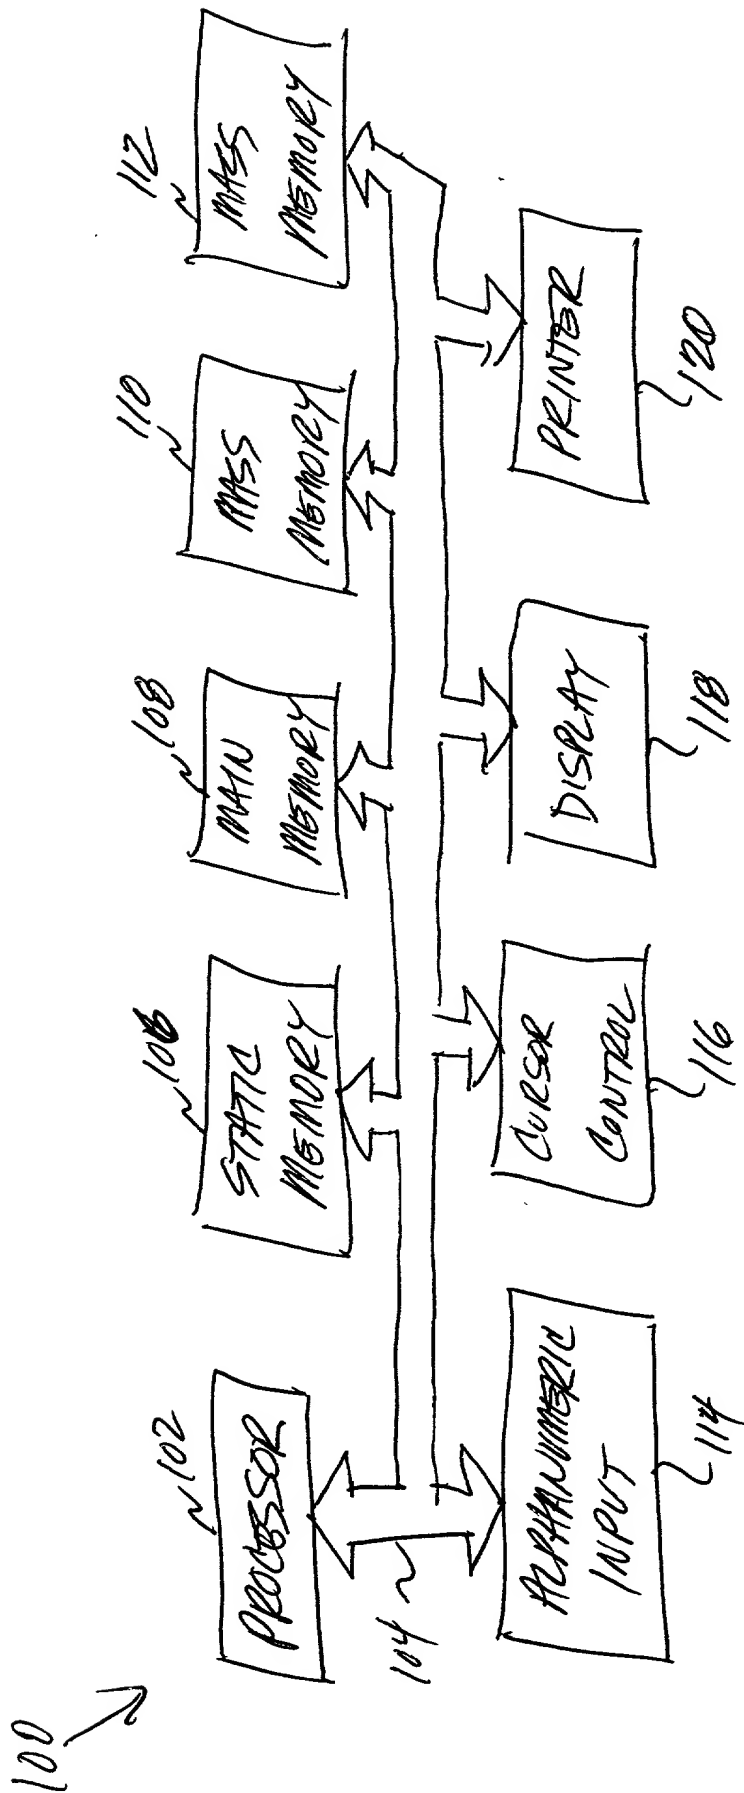


FIG. 1

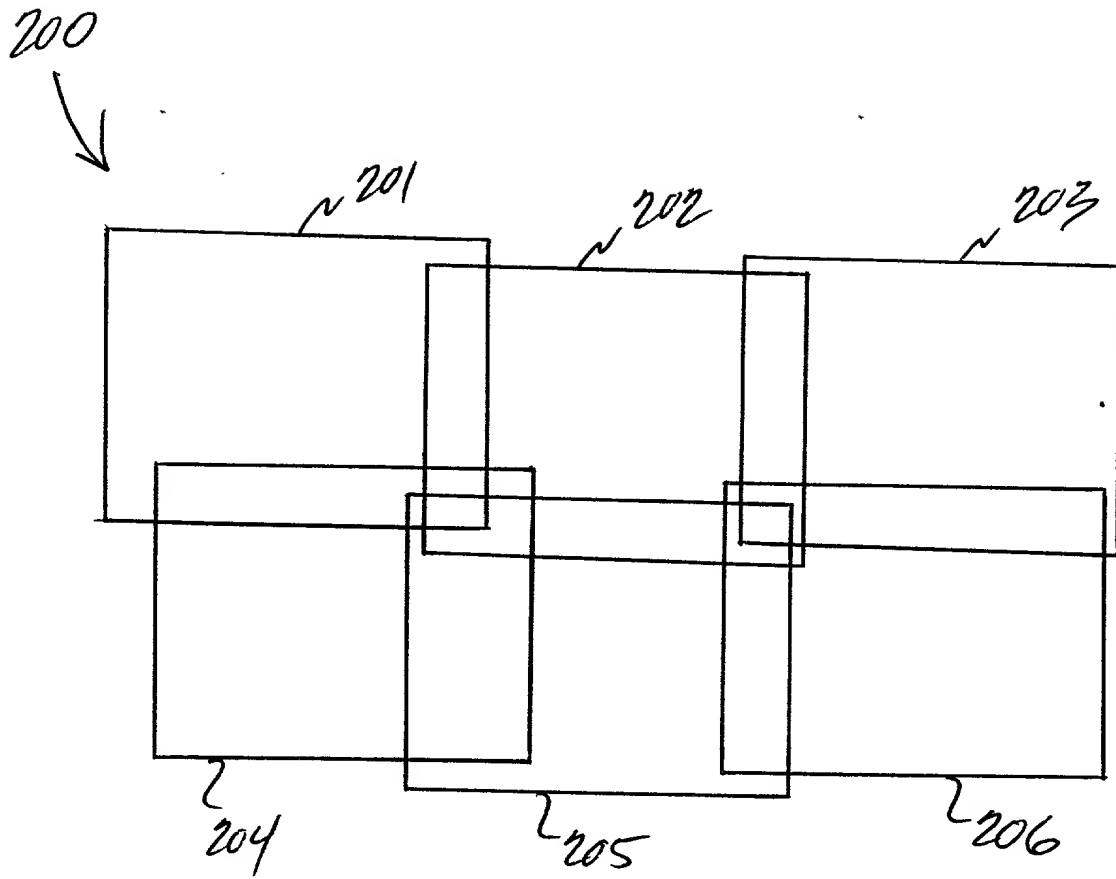


FIG. 2



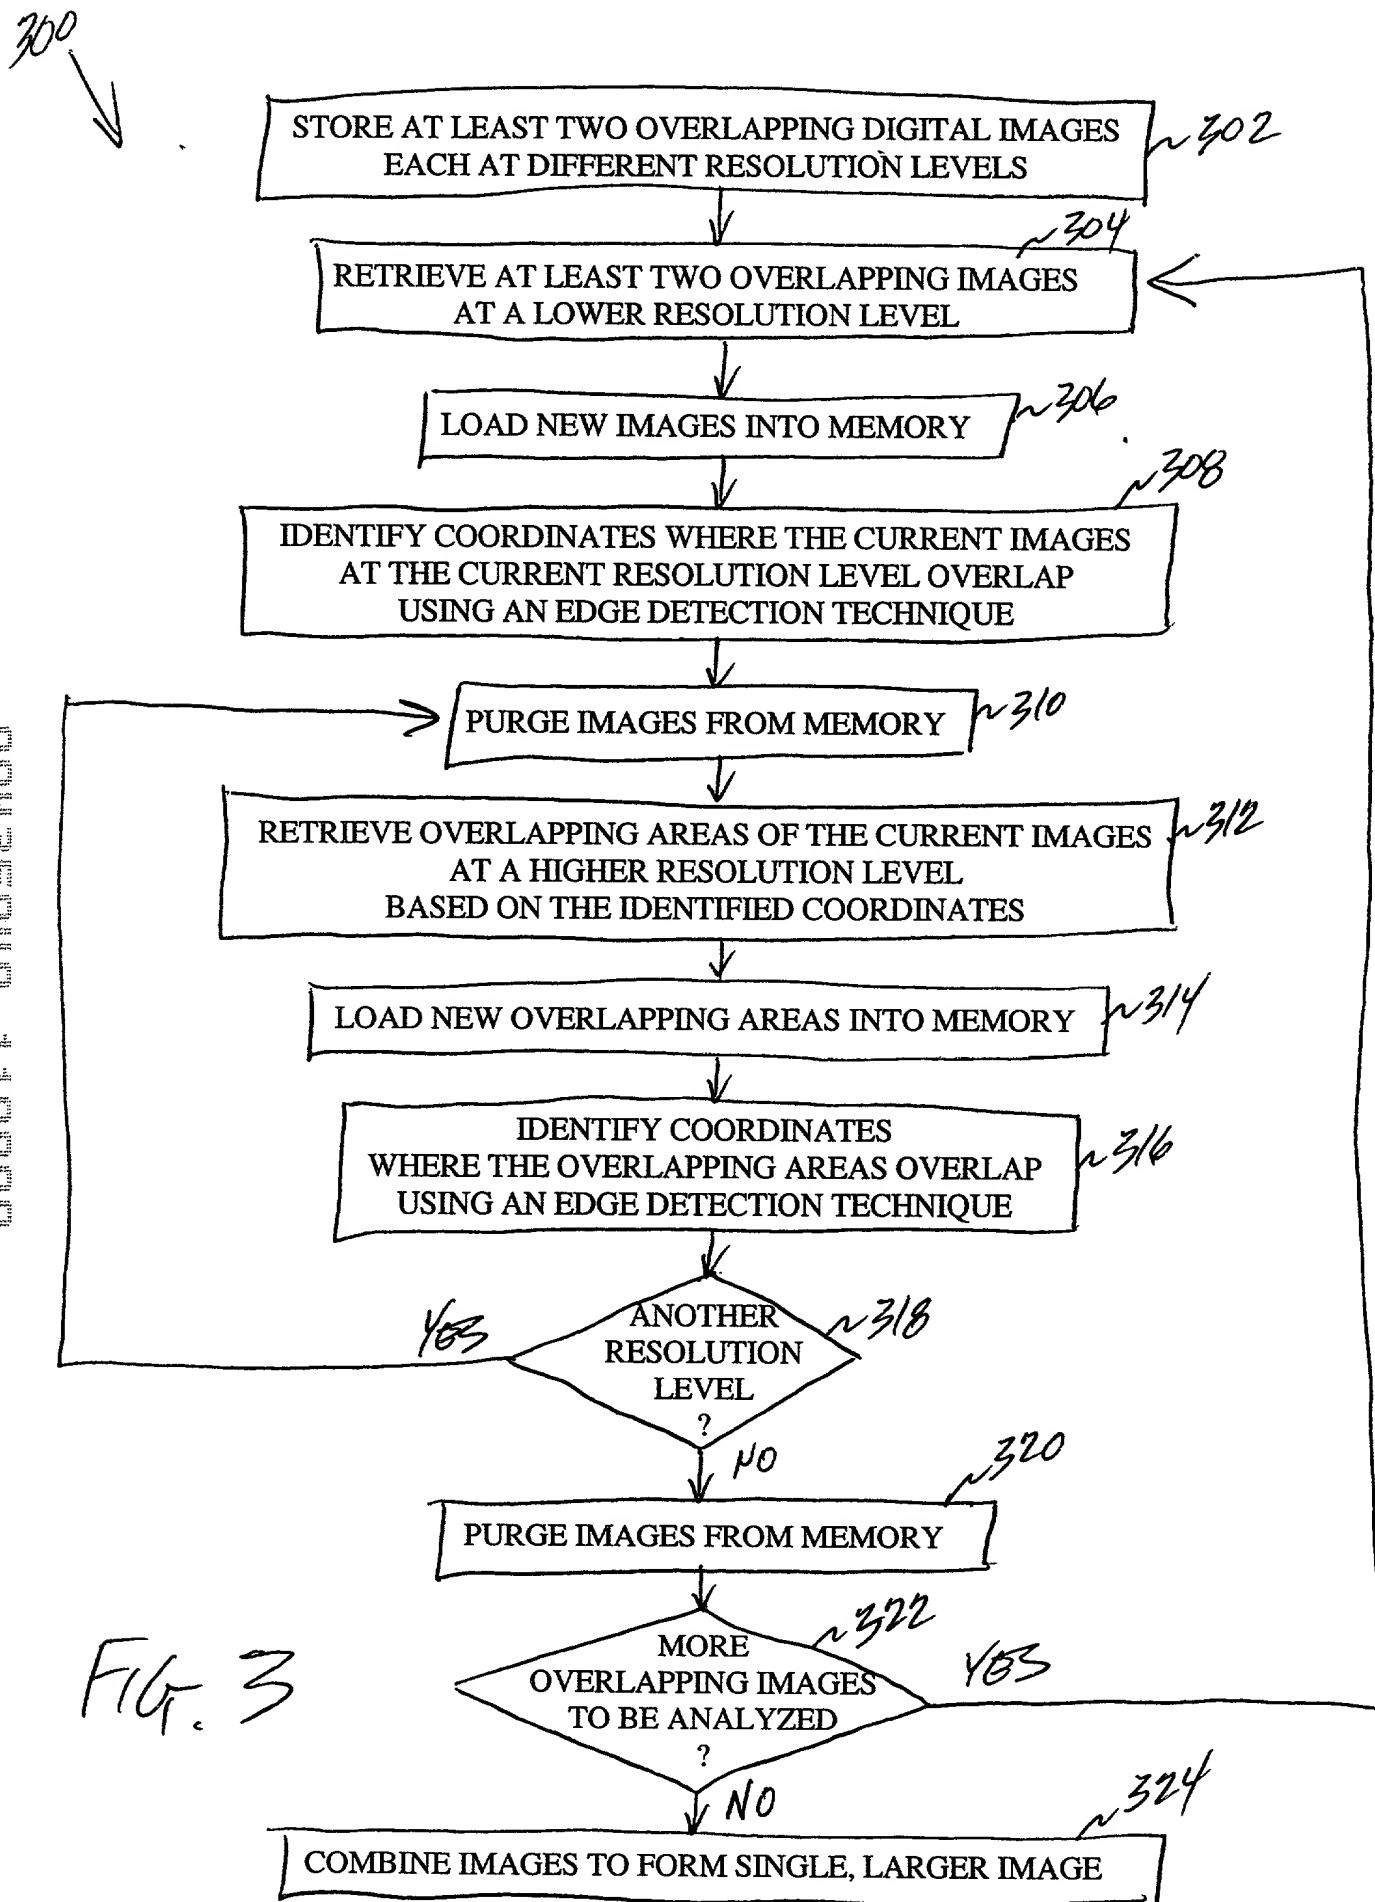


FIG. 3


046540-1039

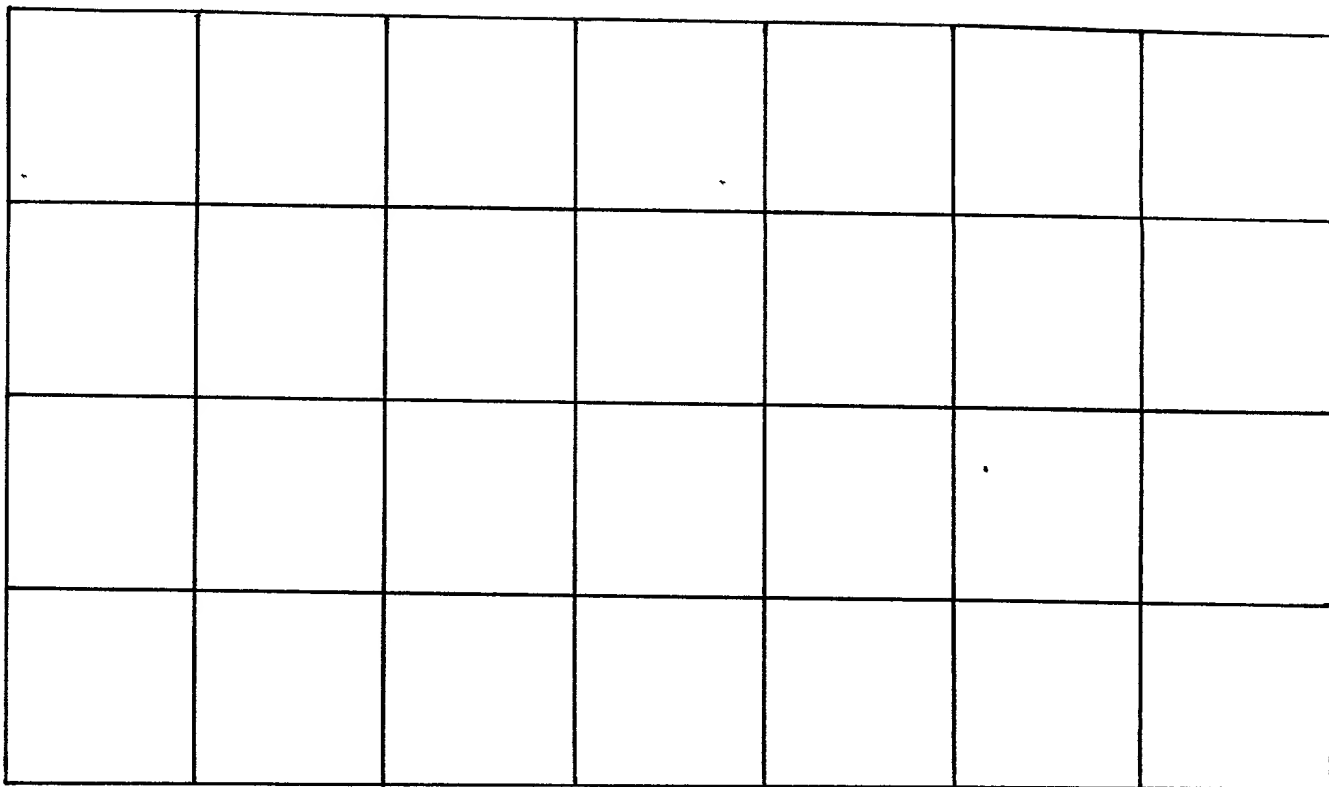


~401

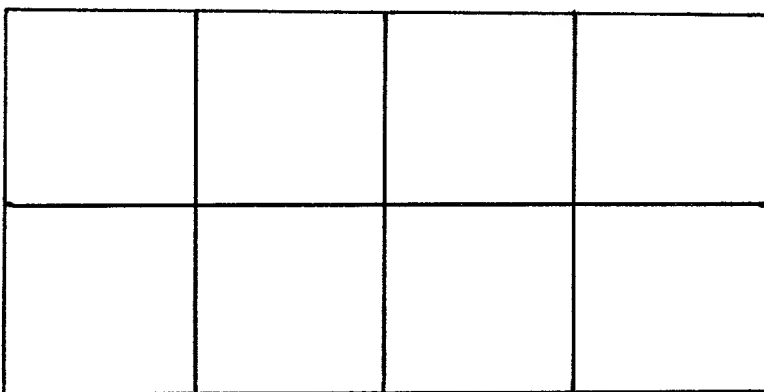

~402

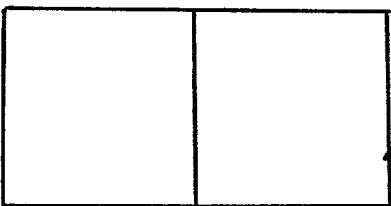

~403



~404

FIG. 4